

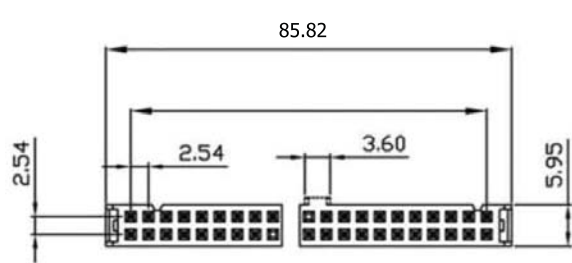
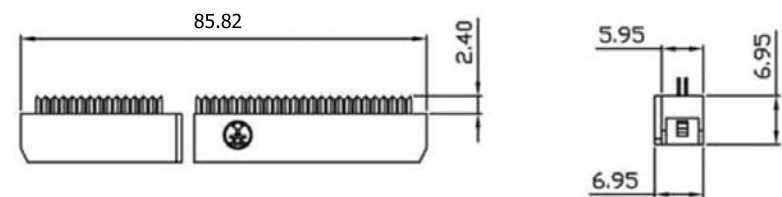
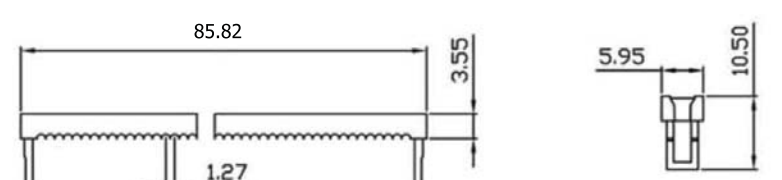


1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

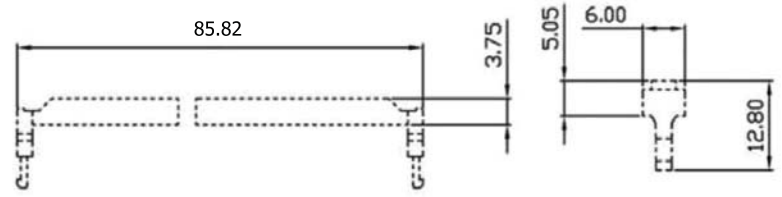

Materials:


- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Underplate: Nickel
- Contact Area: Gold Flash Selective
- Operating Temperature: -55°C~+105°C

Electrical:

- Current Rating: 1 Amp
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC

Unit of Measure: MM±0.1



Scale	1:1							Name
TOLERANCE					Drawn	10.19.11	Chappell	Item No. <h1>AWP64-7241-T-R</h1> Title IDC-Socket -64 Contacts w/Strain Relief Pitch 2.54x2,54MM, Central Guide Lug
X.X	±0.40				Approved			
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
		Modification	Date	Name				Drawing No.
							Replace	rev00
							Sheet	

1 2 3 4 5 6 7